



www.heliosps.com

SDA10-4830

Lithium-ion battery system
for telecommunication

shoto[®]



Make full use of internet platform
Big Data cloud storage
Service for customers worldwide

With market share ranking first in the mainstream of China's telecom operators for many years and have get the net certificate in many regions around the world and sell to 127 nations and districts in five continents.
Shoto firmly promote green low-carbon career and always fulfill the concept of “new energy, circularity and high-tech”, to manage from the five link key aspects: design, development, green purchasing, system management, recycling, energy conservation and emissions reduction to create green model for the industry, to create a green life for human beings and store a green future for the earth.

Pursue the perfection
To build up a strong
and sustainable enterprise

Shoto has owned several honors such as “National environment friendly enterprise”, “National key high-tech industry group”, “ China's top 100 electronic information enterprises ”,“ Global 500 new energy enterprises”.

Explore actively
To find an ever-increasing energy new world

- Communication
Possess all series of energy storage solutions and provide firm green energy security;
- Telecom
Becoming the core of constructing the future smart grid center;
- Power
New clean and efficient power energy, to provide endless power for the social development;
- Recycling
Take the lead in building circulation industry chain, make renewable energy, restore a healthy earth.

Converge global industry experts
and unite research institutes
Collaborate with customers to develop
the world's leading energy storage systems

The establishment of the Chinese Academy of Sciences in cooperation with the establishment of the Advanced Energy Development Research Center, academicians workstation, post-doctoral research station, state-level enterprise technology center have take on the 863 and other national research projects and research and develop the world forward-looking high-end new energy projects.



Application Scenarios

- Telecommunication
- UPS
- Renewable energy system

Product Certificates

- ☑ ISO9001
- ☑ ISO14001
- ☑ CE
- ☑ TLC
- ☑ TÜV

size

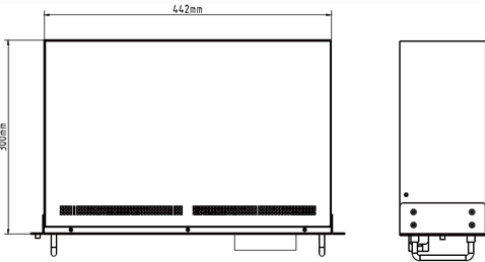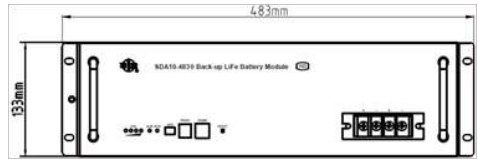

The SDA-4830 series uses new LiFePO₄ technology, this reliable SHOTO product is safe, durable and easy to install in any new or existing telecom sites; especially suitable for outdoor cabinets.

Key advantages

- High energy density: more energy with less weight and footprint.
- High charge currents (short charge period)
- High discharge currents
- Long battery life (up to three times the battery life of a conventional battery)
- High efficiency between charging and discharging
- Higher continual power available
- Wide operating temperature
- Predictable end of life due BMS controller

Technical Parameters

Item		Parameters	
1. Performance Parameter			
Nominal voltage		48V	
Rated capacity		30Ah(C ₅ , 0.2C to 40V at 25 °C)	
Operating voltage range		40V-56.4V	
Charging voltage		56.4V	
Charging current (current-limiting)		5A	
Discharge current (Maximum)		30A	
Discharge cut-off voltage		40V	
Dimensions	Width	442mm	
	Height	133mm	
	Depth	300mm	
Weight		About 20.5kg	
2. Function Description			
Installation method		Rack mounted / Wall mounted	
Communication interface		RS232 / RS485	
Indicator state		ALM / RUN / SOC	
Parallel communication		Maximum support for 16 sets of parallel	
Terminal stud		M6	
Alarm and protection		Over voltage, under voltage, short circuit, overload, over current, over temperature, low temperature protection, etc.	
3. Working Condition			
Cooling mode		Automatic cold and hot	
Altitude		≤4000m	
Humidity		5%-95%	
Operating temperature	Charge	-5 °C ~+45 °C	
	Discharge	-20 °C ~+50 °C	
Recommended operating temperature	Charge	+15 °C ~+35 °C	
	Discharge	+15 °C ~+35 °C	
	Storage	-10 °C ~+35 °C	


SDA10-4830 series Constant Current Discharge Characteristics (25°C,77°F)

Voltage	Current/A									
	0.1C	0.2C	0.3C	0.4C	0.5C	0.6C	0.7C	0.8C	0.9C	1C
46.5V	9.35	4.60	2.86	1.99	1.50	1.17	0.90	0.77	0.52	0.34
45.0V	9.89	4.77	3.10	2.24	1.75	1.44	1.17	1.03	0.85	0.77
43.5V	10.02	4.87	3.14	2.29	1.80	1.49	1.22	1.09	0.96	0.87
42.0V	10.10	4.95	3.22	2.36	1.85	1.54	1.26	1.13	0.99	0.91
40.0V	10.16	5.05	3.32	2.44	1.92	1.60	1.32	1.18	1.04	0.97

SDA10-4830 Constant Power Discharge Characteristics (25°C,77°F)

Voltage	Power/W									
	144	288	432	576	720	864	1008	1152	1296	1440
46.5V	9.32	4.56	2.82	1.97	1.49	1.15	0.88	0.75	0.51	0.34
45.0V	9.86	4.74	3.07	2.23	1.74	1.42	1.16	1.01	0.84	0.77
43.5V	9.99	4.84	3.10	2.27	1.79	1.47	1.20	1.07	0.94	0.86
42.0V	10.07	4.91	3.18	2.34	1.84	1.52	1.24	1.11	0.97	0.91
40.0V	10.13	5.02	3.28	2.42	1.91	1.58	1.30	1.16	1.02	0.96

Discharge Curves

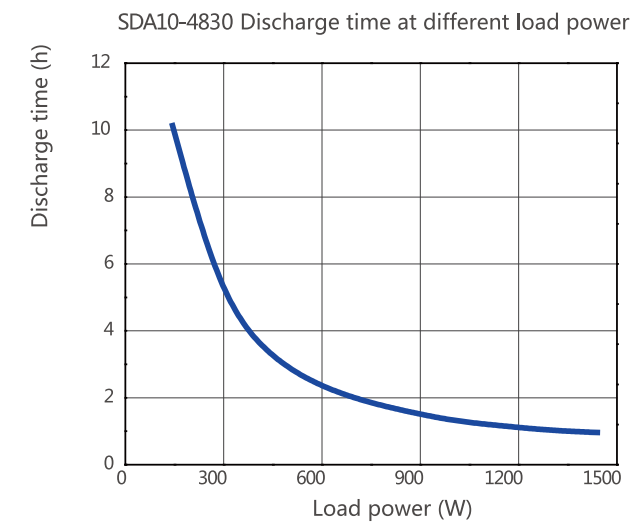

Cycle Life Curves

